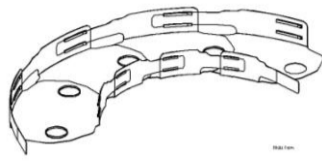
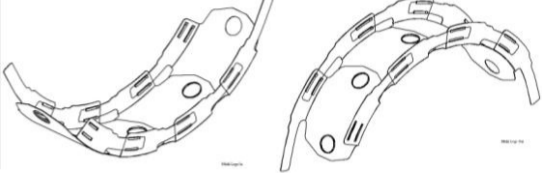


## Flex-C Radius Limits

Material Width	Material Gauge	Slidable or Integral Strap	Minimum (Smallest) Radius in Inches	
			Standard Curve (Right or Left) Measured to Outside Flange 	Leg-In Curve or Leg-Out Curve (Up or Down) Measured to Web 
<b>Flex-C Trac</b>				
2 1/2"	20	Slidable	7	(See Note 1)
3 5/8"	20	Slidable	7	(See Note 1)
4"	20	Integral	10.5	280
6"	20	Slidable	18	(See Note 1)
8"	20	Integral	36	363
10"	20	Integral	45	363
3 5/8"	18	Integral	10.5	205
4"	18	Integral	12.5	185
6"	18	Integral	18	300
8"	18	Integral	36	363
10"	18	Integral	45	363
3 5/8"	16	Integral	10.5	205
4"	16	Integral	12.5	185
6"	16	Integral	18	300
8"	16	Integral	36	363
10"	16	Integral	45	363
<b>Flex-C Angle</b>				
1 1/8" x 2 1/4"	20	Slidable	4	(See Note 1)
2" x 3 5/8"	16	Integral	10.5	205
<b>Flex-C Plate</b>				
2"x4"	20	Slidable	7	(See Note 1)
2"x6"	20	Slidable	7	(See Note 1)
<b>Flex Lite</b>				
3 5/8"	25	Integral	15	156
<b>Flex-C Arch</b>				
2"x4"	20	No Strap	(See Note 2)	9
2"x6"	20	No Strap	(See Note 2)	9
3 5/8"	20	No Strap	(See Note 2)	9
6"	20	No Strap	(See Note 2)	9

Note 1: Strap prevents curving in this (up or down) plane.

Note 2: Flex-C Arch does not curve the standard curve (right or left) way.